


Pierce Oscillator

Design and Crystal Recommendations

Texas Instruments
MSP430x5xx Family

MSP430x5xx Family

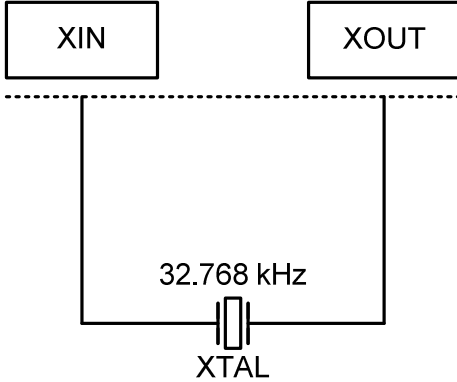

Oscillator Design Check

Test Conditions		
Power Supply Voltage V_{DD}	≥ 1.8	V
Load Capacitors	Integrated	pF
Oscillator Setting XTS	3	----
Oscillator Setting XCAPx	3	----
Results		
Effective Load Capacitance	12.5	pF
Oscillation Allowance	>500	$k\Omega$
Oscillator Output Voltage AC	90	mV_{RMS}
Drive Level	0.010	μW
Startup Time	200	ms
Overtone Mode Suppression	Safe	----

Recommendation

Crystal		
Crystal Type	MS3V-T1R / CC7V-T1A	
Frequency	32.768	kHz
Load Capacitance C_L	7.0 or 12.5	pF
Tolerance	± 20	ppm

Oscillator Settings

		XTS				Effective Load Capacitance C_{Load} / pF	Crystal Load Capacitance C_L / pF
		0	1	2	3		
XCAPx	0					4.3	To be used with external load capacitors
	1	✓				7.5	7.0 pF
	2					10.3	Does not correspond to a standard C_L value
	3				✓	12.5	12.5 pF

Remarks

Recommended setting: XTS = 3 / XCAPx = 3 Corresponding crystal's C_L : 12.5 pF.

Lowest power consumption setting: XTS = 0 / XCAPx = 1 Corresponding crystal's C_L : 7.0 pF.

XTS: oscillator's drive setting, 0 = min to 3 = max.

XCAPx: integrated load capacitors C_{XIN} and C_{XOUT} (represented by $C_{L,eff}$) setting, 0 = 2 pF, 1 = 5.5 pF, 2 = 8.5 pF and 3 = 12.0 pF.

Please find detailed information about MS3V-T1R, CC7V-T1A and all others crystal types at www.microcrystal.com.

Date: September 2010

Revision N°: 2.1

Page 1/1

In accordance with our policy of continuous development and improvement, Micro Crystal reserves the right to modify specifications or design-recommendations without prior notice. The recommendations stated above are based on measured-results, respecting the "oscillator design rules". Micro Crystal makes no representation or warranty for information in this "Design and Crystal Recommendations".

Headquarters: Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
Internet www.microcrystal.com
Email sales@microcrystal.com