


# OCXOS Sine Wave Output

## Standard OCXO – up to 54 MHz



### DIMENSIONS

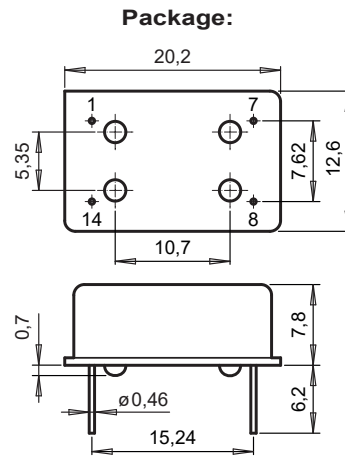

### Pin Out:

pin 1  $V_C$   
 pin 7 GND  
 pin 8  $F_{OUT}$   
 pin 14  $V_{DD}$

Case is connected to GND (pin 7)

All dimensions in mm typical

### APPLICATIONS

Instrumentation  
 Digital Switching  
 Radio Transceiver  
 Airborne Equipment  
 Telecom Transmission  
 Battery Operated Systems  
 Sonet / SDH / DWDM / FDM/36 / WIMAX

### DESCRIPTION

The OCXOS is an Oven Controlled Quartz Crystal Oscillator with Sine Wave Output that incorporates a custom circuit and an XTAL operating under vacuum, in a hermetically sealed DIL-14 metal package.

### FEATURES

High stability and low aging.  
 Very fast warm up.  
 Low power consumption.  
 Operates in fundamental mode.  
 High shock and vibration resistant.  
 RoHS-compliant.

### ELECTRICAL CHARACTERISTICS AT 25°C

Frequency versus temperature A: 0 to +60°C B: -20 to +70°C C: -40 to +85°C E: -55 to +85°C	$\Delta F/F$	see table 1 (without air flow)		
<b>Frequency long term aging</b> long term aging 10 years long term aging 1 <sup>st</sup> year	$\Delta F/F$	< 40 MHz	$\geq 40$ MHz	ppm
		$\leq \pm 3$	$\leq \pm 4$	
Minimum frequency control range by $V_C$ or $R_C$ see table 3	$\Delta F/F$	< 40 MHz	$\geq 40$ MHz	ppm
		$\geq \pm 3$	$\geq \pm 4$	
Supply voltage	$V_{DD}$	3.3 / 5.0		V
Input current	$I_{DD}$	see table 2		mA
Output signal sine wave (load = 50 $\Omega$ )		see table 4		
Start-up time	$t_{START}$	< 5		ms
Frequency stability versus load change of $\pm 5\%$	$\Delta F/F$	< 40 MHz	$\geq 40$ MHz	ppb
		$\leq \pm 10$	$\leq \pm 30$	
Warm-up time within $\pm 0.1$ ppm at +25°C	$V_{DD}$	3.3	5.0	V
	t	$\leq 120$	$\leq 60$	s
Stability versus $V_{DD}$	$\Delta F/F$	< $\pm 0.1$		ppm

1) After 30 days operating

**ELECTRICAL CHARACTERISTICS  
AT 25°C (continuation)**

Short term stability (Allan deviation) at T = 0.1 to 30 s 0.05 ppb typical at T = 1 s	$\sigma$	< 0.5	ppb
Phase noise typical at 10 MHz: Static conditions, 10 Hz BW = 1 Hz 100 Hz 1 kHz 10 kHz 100 kHz	L	-110 -135 -145 -150 -150	dBc/ Hz

**TABLE 1:  $\Delta F/F$ ,  $V_{DD} = 3.3 V$**

Operating Temperature range	$V_{DD} = 3.3 V \pm 0.15 V$
A = 0 to +60°C	$\leq \pm 75$ ppb
B = -20 to +70°C	$\leq \pm 150$ ppb
C = -40 to +85°C	$\leq \pm 250$ ppb

**TABLE 1:  $\Delta F/F$ ,  $V_{DD} = 5.0 V$**

Operating Temperature range	$V_{DD} = 5.0 V \pm 0.2 V$
A = 0 to +60°C	$\leq \pm 75$ ppb
B = -20 to +70°C	$\leq \pm 150$ ppb
C = -40 to +85°C	$\leq \pm 250$ ppb
E = -55 to +85°C	$\leq \pm 300$ ppb

**TABLE 2:  $I_{DD}$  (load  $R_L = 50 \Omega$ )**

Temperature	$V_{DD} = 3.3 V$	$V_{DD} = 5.0 V$
+25°C	$\leq 120$ mA	$\leq 80$ mA
-20°C	$\leq 170$ mA	$\leq 120$ mA
Start-up current at +25°C / duration	$\leq 350$ mA / 30 s	$\leq 300$ mA / 10 s

**TABLE 3: Input pin 1  $V_C$**

Frequency adjustment control	$V_{DD} = 3.3 V$	$V_{DD} = 5.0 V$
Control voltage range $V_C$ (V3 or V5) (input impedance $Z_{VC} > 47 k\Omega$ )	0 to 3.3 V	0.5 to 5.0 V
Control resistor range (R1) $R_C$ between pin $V_C$ and GND (input impedance $Z_{VC} > 4.7 k\Omega$ )	0 to 10 k $\Omega$	0 to 10 k $\Omega$
Slope polarity	Positive	
No frequency control (YA or YB)	Pin $V_C$ has to be connected to GND	

**TABLE 4: OUTPUT SIGNAL  
SINE WAVE**

	$V_{DD} = 3.3 V$	$V_{DD} = 5.0 V$
Load $R_L$	50 $\Omega$	50 $\Omega$
Level $\leq 20$ MHz	$\geq 2$ dBm	$\geq 4$ dBm
Level $> 20$ MHz	$\geq -2$ dBm	$\geq 0$ dBm
Harmonics	$\leq -10$ dBc	$\leq -10$ dBc
Spurious	$\leq -70$ dBc	$\leq -70$ dBc



Micro Crystal AG  
Muehlestrasse 14  
CH-2540 Grenchen  
Switzerland

Phone +41 32 655 82 82  
sales@microcrystal.com  
www.microcrystal.com

**STANDARD FREQUENCIES**

Frequencies			
10.0000 MHz	12.0000 MHz	12.8000 MHz	14.7456 MHz
16.0000 MHz	20.0000 MHz	26.0000 MHz	40.0000 MHz
52.0000 MHz	54.0000 MHz		
Other frequencies from 10 MHz to 54 MHz on request			

**ENVIRONMENTAL CHARACTERISTICS**

	Conditions
Storage temperature range	-55 to +125°C
Shock resistance (survival)	5000 g, 0.3 ms, ½ sine
Vibration resistance (survival)	20 g / 10 – 2000 Hz

**TERMINATIONS AND PROCESSING, OPTION 1**

Pins soldering	+235°C / 10 s max. +260°C / 5 s max.
Package	Metal DIL-14 / 4 pins
Terminations (Option 1) (see Application Manual)	SMD, formed leads (D2)
	THD, Standard (Blank)

**ORDERING INFORMATION**

OCXOS W - C V3 20.000 MHz D2 XXX	
<b>Supply voltage</b>	<b>Frequency</b>
W = V <sub>DD</sub> = 3.3 V	<b>Option 1</b>
V = V <sub>DD</sub> = 5.0 V	D2 = SMD (formed leads)
<b>Temperature range</b>	Blank = THD (Standard)
A = 0 to +60°C	<b>Customer specification N°</b>
B = -20 to +70°C	
C = -40 to +85°C	
E = -55 to +85°C *	
X = Custom	
<b>Frequency control</b>	* E version is only available at 5.0 V version (V)
R1 = R <sub>c</sub> = 0 to 10 kΩ	
V3 = V <sub>c</sub> = 0 to 3.3 V	
V5 = V <sub>c</sub> = 0.5 to 5.0 V	
YA = Internal accuracy ≤ ±1.0 ppm	
YB = Internal accuracy ≤ ±0.5 ppm	
Y = Custom	
A unique part number will be generated for each product specification, i.e:	
20xxxx-EA00	yyy pcs (in ESD plastic tray)

All specifications subject to change without notice.



MICRO CRYSTAL SWITZERLAND

A COMPANY OF THE SWATCH GROUP

Micro Crystal AG  
Muehlestrasse 14  
CH-2540 Grenchen  
Switzerland

Phone +41 32 655 82 82  
sales@microcrystal.com  
www.microcrystal.com