




### DIMENSIONS

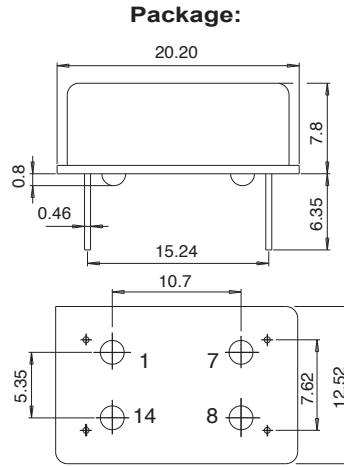

### Pin out

- Pin 1 = Voltage control
- Pin 7 = GND
- Pin 8 = Fout
- Pin 14 = Vdd

All dimensions in mm typical

**Oven control quartz crystal oscillator**  
**Fundamental mode frequency**  
**High shock and vibration resistance**  
**Wide temperature range**  
**Low aging**  
**Customer specification on request**  
**Ultra fast warm up**  
**Ultra low power consumption**  
**Swiss made quality**

### DESCRIPTION:

This DIL 14 package has been specially designed for the applications:

- Digital switching
- Telecom transmission
- Sonet / SDH / DWDM / FDM/36 / WIMAX
- Airbone equipments
- Battery operated systems
- Instrumentation
- Radio Transceiver

The OCXO are supplied on trays (50 pcs/tray).

### ELECTRICAL CHARACTERISTICS 25°C

<b>Frequency versus temperature</b> A: 0 to +60°C B: -20 to +70°C C: -40 to +85°C E: -55 to +85°C	$\Delta F/F$	see table 1 (without air flow)			
<b>Frequency long term aging 1)</b> long term aging 10 years long term aging 1 <sup>st</sup> year	$\Delta F/F$	< ± 2.5 ≤ ± 0.3		ppm	
Frequency control range	Vc	≥ ± 2.5 (see table 3)		ppm	
Supply voltage	Vdd	3.3 / 5 / 12		V	
Input current	Idd	see table 2			
Output signal		HC-MOS compatible			
Symmetry at Vdd/2		40 / 60		%	
Rise & fall time (without load)		≤ 7		nS	
Level "0" & "1"		< 0.4V > Vcc-0.5		V	
Start-up time	t	< 5		ms	
Load min / max		3/47		pF	
Frequency stability versus load ± 10%	$\Delta F/F$	≤ ± 10		ppb	
Warm-up within ± 0.1 ppm at 25°C	Vdd	3.3	5	12	V
	t	≤ 30	≤ 20	≤ 15	s
Stability versus Vdd	$\Delta F/F$	< ± 0.1		ppm	
Short term stability 0.1 to 30s 5E-11 typ at 1s	Tau	< 1		E-10	
Phase noise typical at 10 MHz Static conditions BW = 1Hz		3.3 / 5V		12V	dBc/ Hz
	10Hz	-100	-90		
	100Hz	-130	-120		
	1 kHz	-140	-130		
	10 kHz	-145	-135		

1) <± 1 E-9 / day after 30 days operating

**TABLE 1: Vdd = 3.3V**

Operating Temperature range	Vdd = 3.3V ± 0.15V	
	Version standard	Version high stability
A = 0 to +60°C	≤ ± 75 ppb	≤ ± 50 ppb
B = -20 to +70°C	≤ ± 150 ppb	≤ ± 75 ppb
C = -40 to +85°C	≤ ± 250 ppb	≤ ± 100 ppb
E = -55 to +85°C	≤ ± 400 ppb	≤ ± 200 ppb

**TABLE 1: Vdd = 5V**

Operating Temperature range	Vdd = 5V ± 0.2V	
	Version standard	Version high stability
A = 0 to +60°C	≤ ± 50 ppb	≤ ± 25 ppb
B = -20 to +70°C	≤ ± 100 ppb	≤ ± 50 ppb
C = -40 to +85°C	≤ ± 150 ppb	≤ ± 100 ppb
E = -55 to +85°C	≤ ± 400 ppb	≤ ± 200 ppb

**TABLE 1: Vdd = 12V**

Operating Temperature range	Vdd = 12V ± 0.5V	
	Version standard	Version high stability
A = 0 to +60°C	< ± 50 ppb	≤ ± 25 ppb
B = -20 to +70°C	≤ ± 100 ppb	≤ ± 50 ppb
C = -40 to +85°C	≤ ± 150 ppb	≤ ± 100 ppb
E = -55 to +85°C	≤ ± 400 ppb	≤ ± 200 ppb

**TABLE 2: Idd**

Temperature	Vdd = 3.3V	Vdd = 5V	Vdd = 12V
25°C	≤ 80 mA	≤ 50 mA	≤ 25 mA
-20°C	≤ 120 mA	≤ 80 mA	≤ 40 mA
start-up current at 25°C duration	≤ 350mA 10s	≤ 300mA 10s	≤ 250mA 10s

**TABLE 3:**

Frequency control adjustment response slope positive	Vdd = 3.3V	Vdd = 5V	Vdd = 12V
Voltage control input impedance > 47kΩ	0 to 3.3V	0.5 to 5V	0.5 to 5V
Resistor control R connect pin 1 to ground (Input impedance > -4,7kΩ)	0 to 10kΩ	0 to 10kΩ	0 to 10kΩ
No frequency control YA or YB	Pin 1 connect to GND		



Micro Crystal AG  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland

Tel. +41 32 655 82 82  
Fax +41 32 655 80 90  
sales@microcrystal.com  
www.microcrystal.com

**STANDARD FREQUENCIES:**

Frequency «MHz»						
10	12.8	14.7456	16.384	20	25.6	26
32.768	40	52	54			
Other frequencies from 10 kHz up to 54 MHz on request						

**ENVIRONMENTAL CHARACTERISTICS:**

Storage temp. range	-55 to +125°C
Vibration resistance	10 to 2000Hz / 20g
Shocks resistance	5000g / 0.3ms / ½ sine

**TERMINATIONS AND PROCESSING:**

Pin soldering	+235°C / 10s max +260°C / 5s max
Package SMD version option D1 or D2 see application note	Dil 14.4 pins GND to case height = 8mm

**PRODUCT DESCRIPTION AND ORDERING INFORMATION:**

**SCOCXOL V T - C V5 20MHz XXX**

W = Vdd 3.3V  
V = Vdd 5V  
blank = Vdd 12V

T = high stability  
blank = standard stability

A = 0 to +60°C  
B = -20 to +70°C  
C = -40 to +85°C  
E = -55 to +85°C  
X = custom

R1 = R = 0 to 10kΩ  
V3 = Vc = 0 to 3.3V  
V5 = Vc = 0.5 to 5V

YA internal accuracy= ± 1ppm  
YB internal accuracy= ± 0.5ppm  
Y = custom

Frequency \_\_\_\_\_

customer spec N° \_\_\_\_\_

A unique part number will be generated for each product specification, i.e:  
**20xxxx-EA00** (in ESD plastic tray)  
Please contact us.

All specifications subject to change without notice.



Micro Crystal AG  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland

Tel. +41 32 655 82 82  
Fax +41 32 655 80 90  
sales@microcrystal.com  
www.microcrystal.com