



SCOCXOS Sine Wave Output

High Stability OCXO – up to 120 MHz



DIMENSIONS

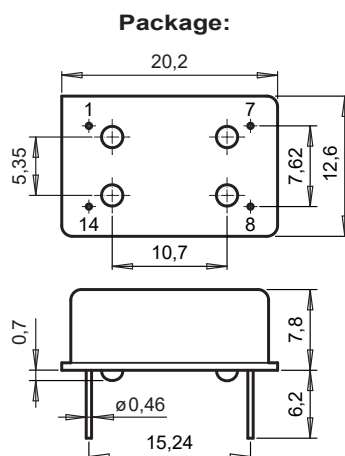

Pin Out:

pin 1 V_C
pin 7 GND
pin 8 F_{OUT}
pin 14 V_{DD}

Case is connected to GND (pin 7)

All dimensions in mm typical

APPLICATIONS

Instrumentation
Digital Switching
Radio Transceiver
Airborne Equipment
Telecom Transmission
Battery Operated Systems
Sonet / SDH / DWDM / FDM/36 / WIMAX

DESCRIPTION

The SCOCXOS is an Oven Controlled Quartz Crystal Oscillator with Sine Wave Output that incorporates a custom circuit and an XTAL operating under vacuum, in a hermetically sealed DIL-14 metal package.

FEATURES

High stability and low aging.
Very fast warm up.
Low power consumption.
Operates in fundamental mode.
High shock and vibration resistant.
RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Frequency versus temperature A: 0 to +60°C B: -20 to +70°C C: -40 to +85°C E: -55 to +85°C	$\Delta F/F$	see table 1 (without air flow)	
Frequency long term aging long term aging 10 years long term aging 1 st year	$\Delta F/F$	< 40 MHz ≥ 40 MHz	ppm
Minimum frequency control range by V_C or R_C see table 3	$\Delta F/F$	< 40 MHz ≥ 40 MHz	ppm
Supply voltage	V_{DD}	3.3 / 5.0	V
Input current	I_{DD}	see table 2	mA
Output signal sine wave (load = 50 Ω)		see table 4	
Start-up time	t_{START}	< 5	ms
Frequency stability versus load change of ±5%	$\Delta F/F$	< 40 MHz ≥ 40 MHz	ppb
Warm-up time within ±0.1 ppm at +25°C	V_{DD} t	3.3 ≤ 120	V s
Stability versus V_{DD}	$\Delta F/F$	< ±0.1	ppm

1) After 30 days operating

**ELECTRICAL CHARACTERISTICS
AT 25°C (continuation)**

Short term stability (Allan deviation) at T = 0.1 to 30 s 0.05 ppb typical at T = 1 s	σ	< 0.1		ppb
Phase noise typical: Standard version (Blank)	L	10 MHz	100 MHz	dBc/Hz
Static conditions, 10 Hz		-110	-80	
BW = 1 Hz 100 Hz		-135	-110	
1 kHz		-145	-130	
10 kHz		-150	-140	
100 kHz		-150	-140	
Phase noise typical: Low phase noise version (H)	L	10 MHz	100 MHz	dBc/Hz
Static conditions, 10 Hz		-110	-90	
BW = 1 Hz 100 Hz		-140	-120	
1 kHz		-155	-140	
10 kHz		-160	-150	
100 kHz		-160	-155	

TABLE 1: $\Delta F/F$, $V_{DD} = 3.3$ V

Operating Temperature range	$V_{DD} = 3.3$ V ± 0.15 V	
	Standard (Blank)	High stability version (T)
A = 0 to +60°C	$\leq \pm 75$ ppb	$\leq \pm 50$ ppb
B = -20 to +70°C	$\leq \pm 150$ ppb	$\leq \pm 75$ ppb
C = -40 to +85°C	$\leq \pm 250$ ppb	$\leq \pm 100$ ppb

TABLE 1: $\Delta F/F$, $V_{DD} = 5.0$ V

Operating Temperature range	$V_{DD} = 5.0$ V ± 0.2 V	
	Standard (Blank)	High stability version (T)
A = 0 to +60°C	$\leq \pm 50$ ppb	$\leq \pm 25$ ppb
B = -20 to +70°C	$\leq \pm 100$ ppb	$\leq \pm 50$ ppb
C = -40 to +85°C	$\leq \pm 150$ ppb	$\leq \pm 100$ ppb
E = -55 to +85°C	$\leq \pm 400$ ppb	$\leq \pm 200$ ppb

TABLE 2: I_{DD} (load $R_L = 50$ Ω)

Temperature	$V_{DD} = 3.3$ V	$V_{DD} = 5.0$ V
+25°C	≤ 120 mA	≤ 80 mA
-20°C	≤ 170 mA	≤ 120 mA
Start-up current at +25°C / duration	≤ 350 mA / 30 s	≤ 300 mA / 10 s

TABLE 3: Input pin 1 V_C

Frequency adjustment control	$V_{DD} = 3.3$ V	$V_{DD} = 5.0$ V
Control voltage range V_C (V3 or V5) (input impedance $Z_{VC} > 47$ k Ω)	0 to 3.3 V	0.5 to 5.0 V
Control resistor range (R1) R_C between pin V_C and GND (input impedance $Z_{VC} > 4.7$ k Ω)	0 to 10 k Ω	0 to 10 k Ω
Slope polarity	Positive	
No frequency control (YA or YB)	Pin V_C has to be connected to GND	

**TABLE 4: OUTPUT SIGNAL
SINE WAVE**

	$V_{DD} = 3.3$ V	$V_{DD} = 5.0$ V
Load R_L	50 Ω	50 Ω
Level ≤ 20 MHz	≥ 2 dBm	≥ 4 dBm
Level > 20 MHz	≥ -6 dBm	≥ -4 dBm
Harmonics	-15 dBc (typ)	-15 dBc (typ)
Spurious	≤ -70 dBc	≤ -70 dBc

STANDARD FREQUENCIES

Frequencies			
10.0000 MHz	12.8000 MHz	14.7456 MHz	16.0000 MHz
20.0000 MHz	26.0000 MHz	40.0000 MHz	50.0000 MHz
52.0000 MHz	54.0000 MHz	100.0000 MHz	
Other frequencies from 10 MHz to 120 MHz on request			

ENVIRONMENTAL CHARACTERISTICS

	Conditions
Storage temperature range	-55 to +125°C
Shock resistance (survival)	5000 g, 0.3 ms, ½ sine
Vibration resistance (survival)	20 g / 10 – 2000 Hz

TERMINATIONS AND PROCESSING, OPTION 1

Pins soldering	+235°C / 10 s max. +260°C / 5 s max.
Package	Metal DIL-14 / 4 pins
Terminations (Option 1) (see Application Manual)	SMD, formed leads (D2) THD, Standard (Blank)

ORDERING INFORMATION

SCOCXOS H W T - C V3				20.000 MHz	D2	XXX
Phase noise				Frequency		
H = Low phase noise				Option 1		
Blank = Standard				D2 = SMD (formed leads)		
Supply voltage				Blank = THD (Standard)		
W = V_{DD} = 3.3 V				Customer specification N°		
V = V_{DD} = 5.0 V						
Frequency stability						
T = High stability						
Blank = Standard						
Temperature range						
A = 0 to +60°C						
B = -20 to +70°C						
C = -40 to +85°C						
E = -55 to +85°C *						
X = Custom						
Frequency control						
R1 = R_C = 0 to 10 kΩ						
V3 = V_C = 0 to 3.3 V						
V5 = V_C = 0.5 to 5.0 V						
YA = Internal accuracy $\leq \pm 1.0$ ppm						
YB = Internal accuracy $\leq \pm 0.5$ ppm						
Y = Custom						
				* E version is only available at 5.0 V version (V)		
A unique part number will be generated for each product specification, i.e:						
20xxxx-EA00		yyy pcs (in ESD plastic tray)				

All specifications subject to change without notice.